


YN128

Beautify LED Light
(User manual for 3200K-5500K)

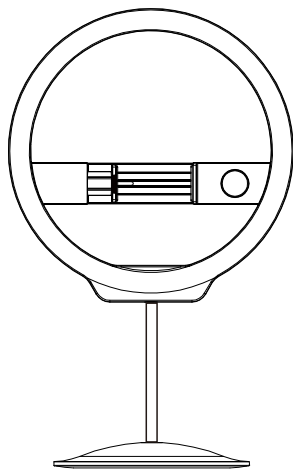

Thank you for using the YN128 Beautify LED Light. Please read the manual carefully and keep this user manual properly for reference.

Function Introduction

- 1、YN128 is a beautify LED Light for live camera streaming. Its TLCI and CRI are all exceeded 95.
- 2、YN128 adopts blue-ray filtering panel design to protect eyes when this LED light is in long-our use. With annular appearance, the circular catch-light can be taken easily, which makes your eyes look charming.
- 3、YN128 adopts 128pcs of SMD LEDs with high CRI. In the equivalent energy consumption, the luminous intensity is higher, the supplementary lighting is more accurate and reliable, the catch-lights is much more attractive.
- 4、YN128 has a micro USB power port. With this micro USB power port, phone chargers, computer USB and portable power bank can supply power for YN128, which make it possible to have fun time with YN128 whenever and wherever.
- 5、YN128 adopts YONGNUO proprietary LED constant current driving technology which does great help to effectively avoid corrugation and stroboscopic flash.
- 6、For YN128 is equipped with hose support, it can be adjusted to any angle needed. At the meanwhile, for YN128 is equipped with stable stand, you can use it on desktop or other platform.


precautions

- 1、Do not disassemble or maintain this product. If any failure found, please contact YONGNUO Customer Service Center for after-sales service.
- 2、Do not use this product under the flammable, explosive or raining environment.
- 3、Do not use voltage-unsteady or current-unsteady DC power charger to charge this product. If not, this product may be damaged and cannot be used.

Product Specificaion

Light Source	128 piece of SMD LEDs	Luminance Angle	110 °
Color Temperature	3200K-5500K	Average Service Life	50000H
Color Rendering Index	≥95	Lumen	1024LM
Output power	7.6W	dimension	285*276*51MM
Weight	940G	External power source	Charged via phone charger, portable power bank, computer USB port
Contents: Video light(1); user manual (1);Stand (1), hose support (1), USB power cable (1); Light base(1). Note: Please contact your dealer if the contents missing.			


Product Structure

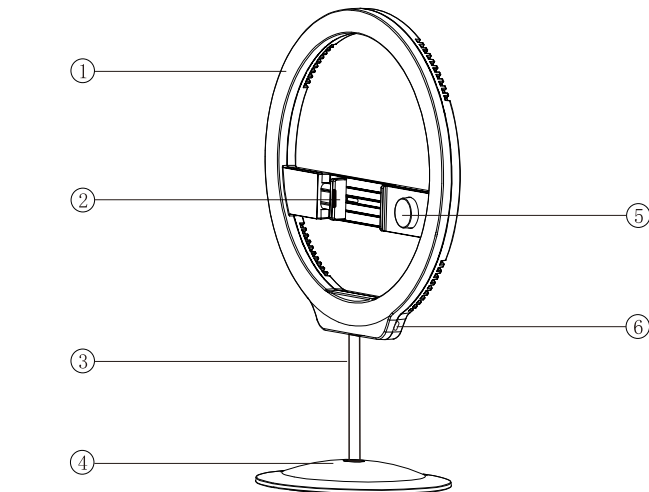

- 1、Soft-light panel
- 2、Phone fixed seat
- 3、Hose support (can be 360-degree adjusted)
- 4、Stand
- 5、Power switch/color adjusting knob (short press to turn on; short press again to switch color temperature; long press to turn off)
- 6、Power port

Method Application

- 1、For mobile phone live video and Self-portrait use

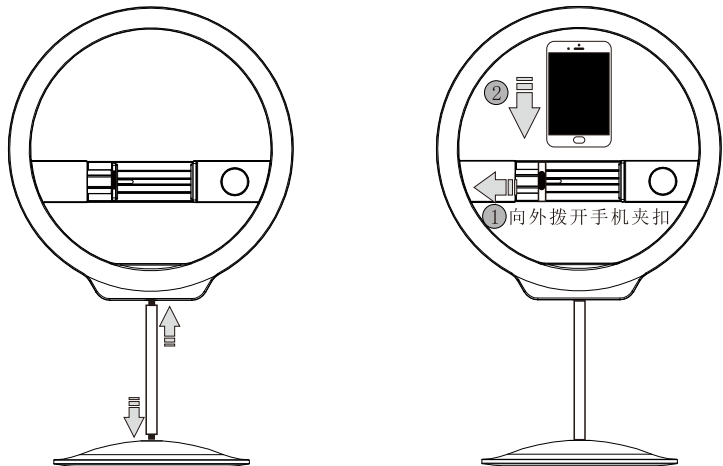


a、Connect LED light to stand with hose support; hose support can be 360-degree adjusted.

b、Attach and fix the phone

- 2、For portrait photography use

The camera lamp can be fastened as follows as needed.
To SLR/Camera Hot Shoe (Portable charger is recommended for power supply)

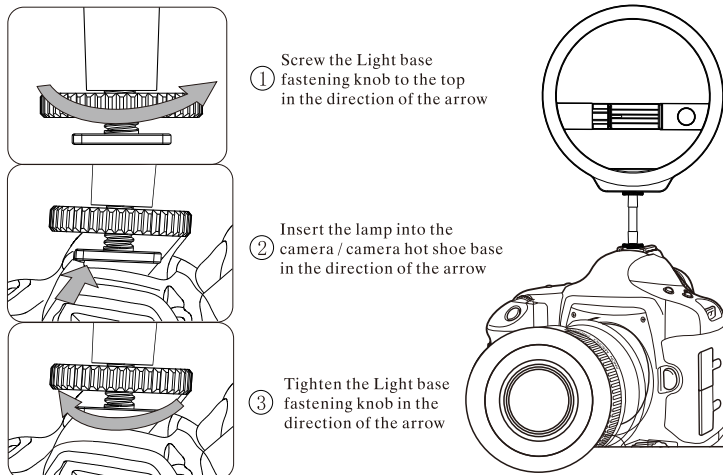


① Screw the Light base fastening knob to the top in the direction of the arrow

② Insert the lamp into the camera / camera hot shoe base in the direction of the arrow

③ Tighten the Light base fastening knob in the direction of the arrow


Installation and fixed

- 1、External Power Supply
Please charge this LED light via phone charger, portable power bank or computer with USB ports.
Note: If this LED light is found unstable, or this LED light dies out automatically when its power is set to maximum, please change to the power source of larger power or lower the power level.

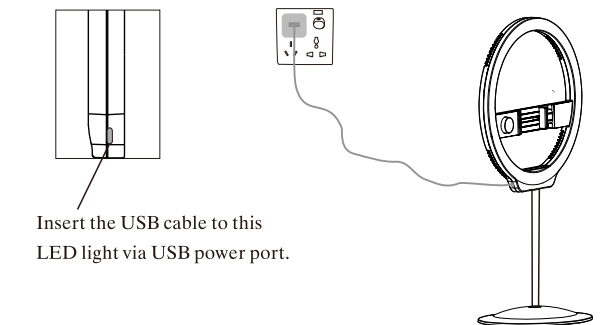

Insert the USB cable to this LED light via USB power port.

- 2、Power switch, Power Adjustment and Color Temperature
Short press power switch button, the LED light turns on; short press it again, the color temperature can be adjusted; long press it to turn off. Rotate towards right side, the brightness increase; rotate towards left side, the brightness decrease. 5000K and 3200K is divided into 20 level. When it's effectively regulated, the blue indicators is blinking.

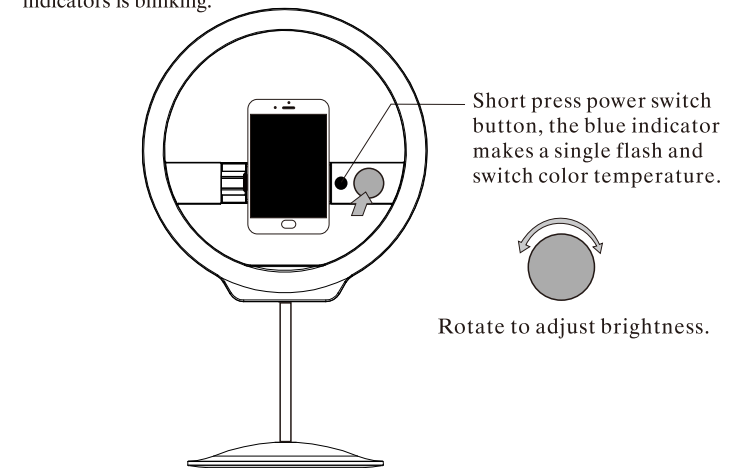

Rotate to adjust brightness.

Failure Analysis and Troubleshooting

When using this product ,you may encounter the following problema:

Description	Cause	Troubleshooting
No reaction after power on	The voltage or current from the power supply is insufficient.	Please change to power source of larger power.
	Damaged circuit board	Depot repair
Inadequate or low luminance at the greatest luminous intensity	The voltage or current from the power supply is insufficient.	Please use it with power source of larger power, or lower the brightness.

The functions in this manual are based on the test conditions of our company. Further notice will not be given if the design and specifications change.

SHENZHEN YONGNUO PHOTOGRAPHY EQUIPMENT Co.Ltd.
Add:Building A, Shenfubao modern optics factory,Kengzi Street, Pingshan District, Shenzhen
TEL:0755-8376 2448
Wed:www.hkyongnuo.com
Manufacture address:4/F,Building 2, Donglongxing Technology Park,East Huaning Road, Dalang Street,Longhua District,Shenzhen
After-sales Service TEL:400-0013-888